
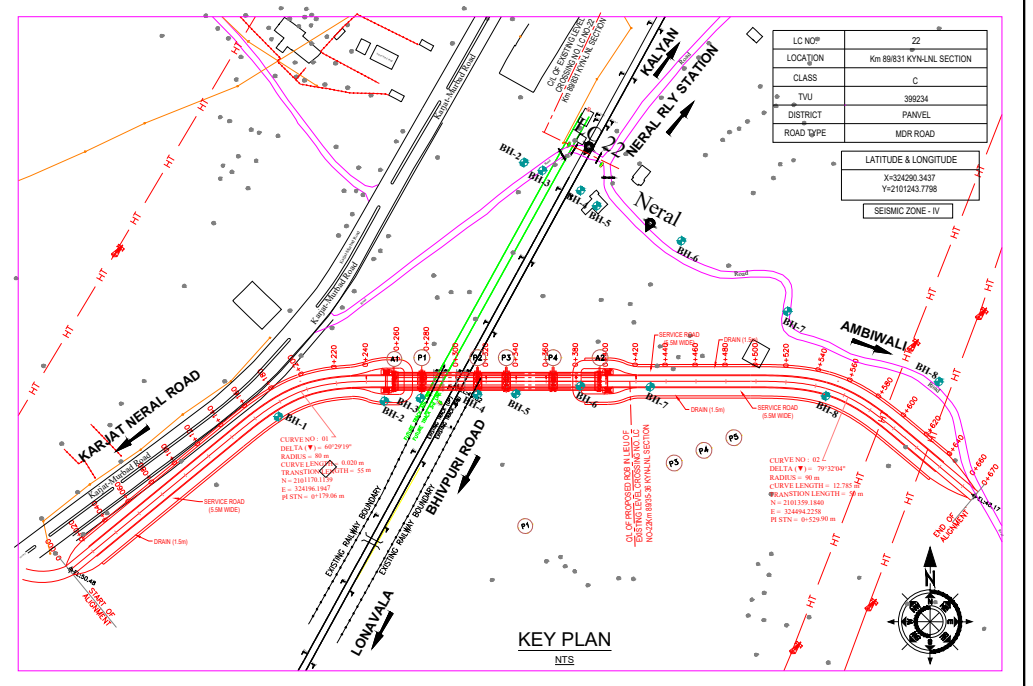
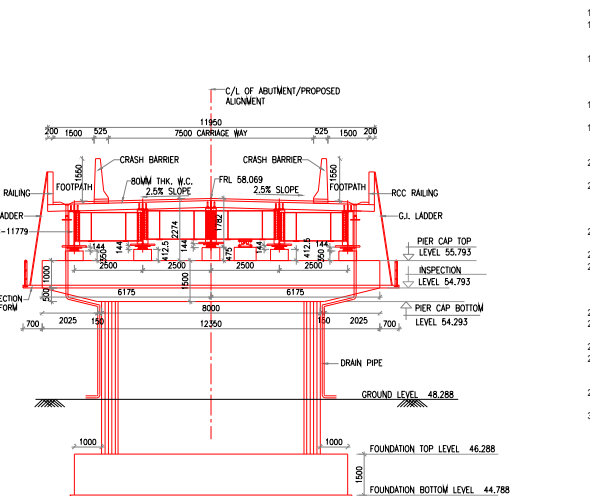
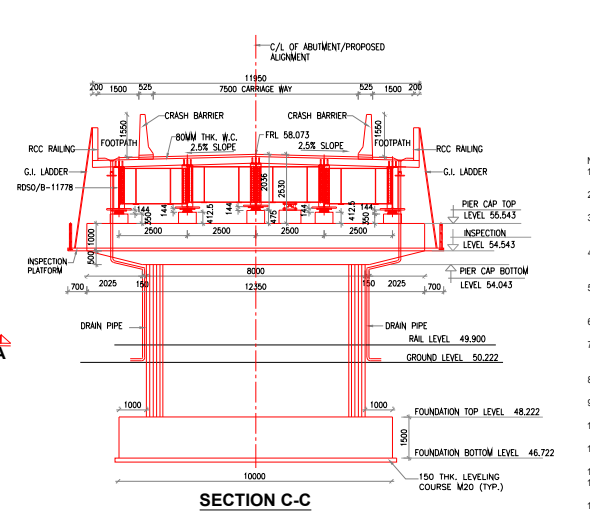
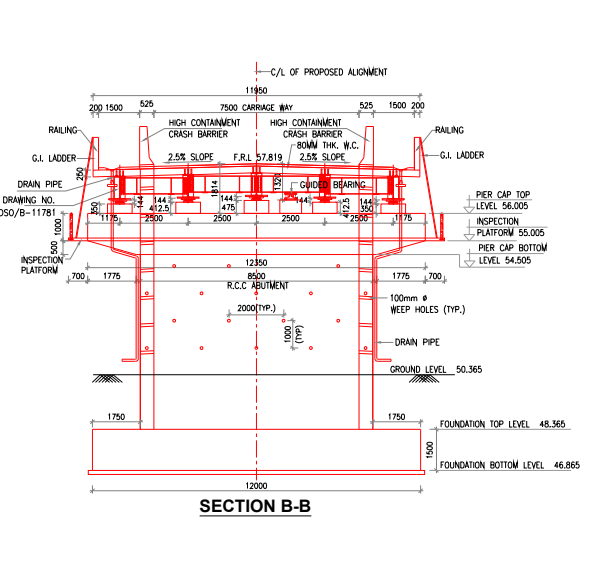
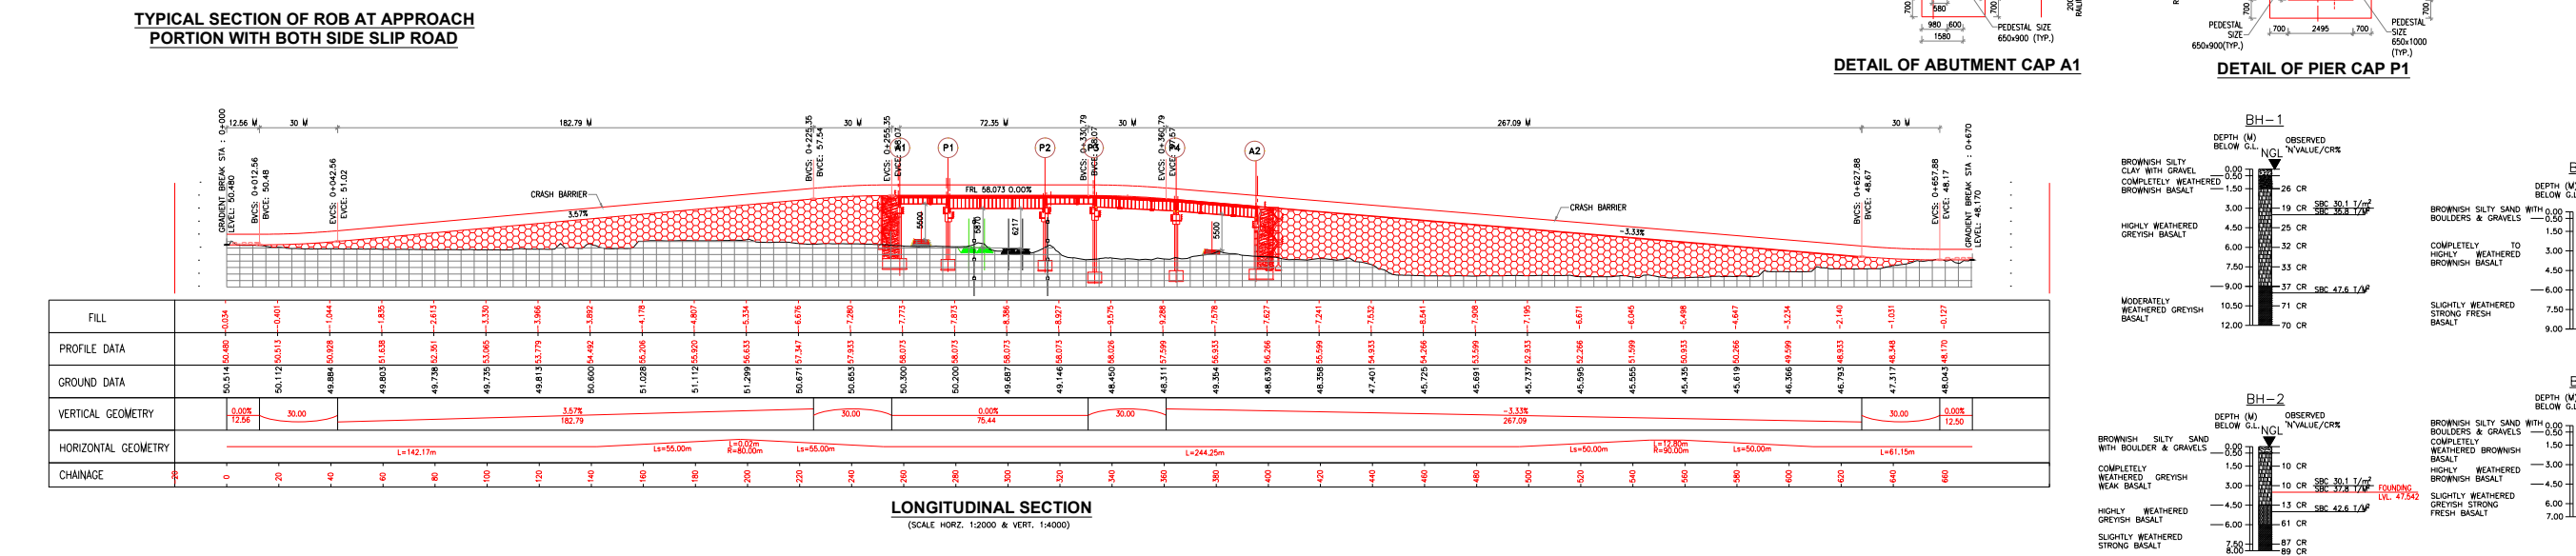
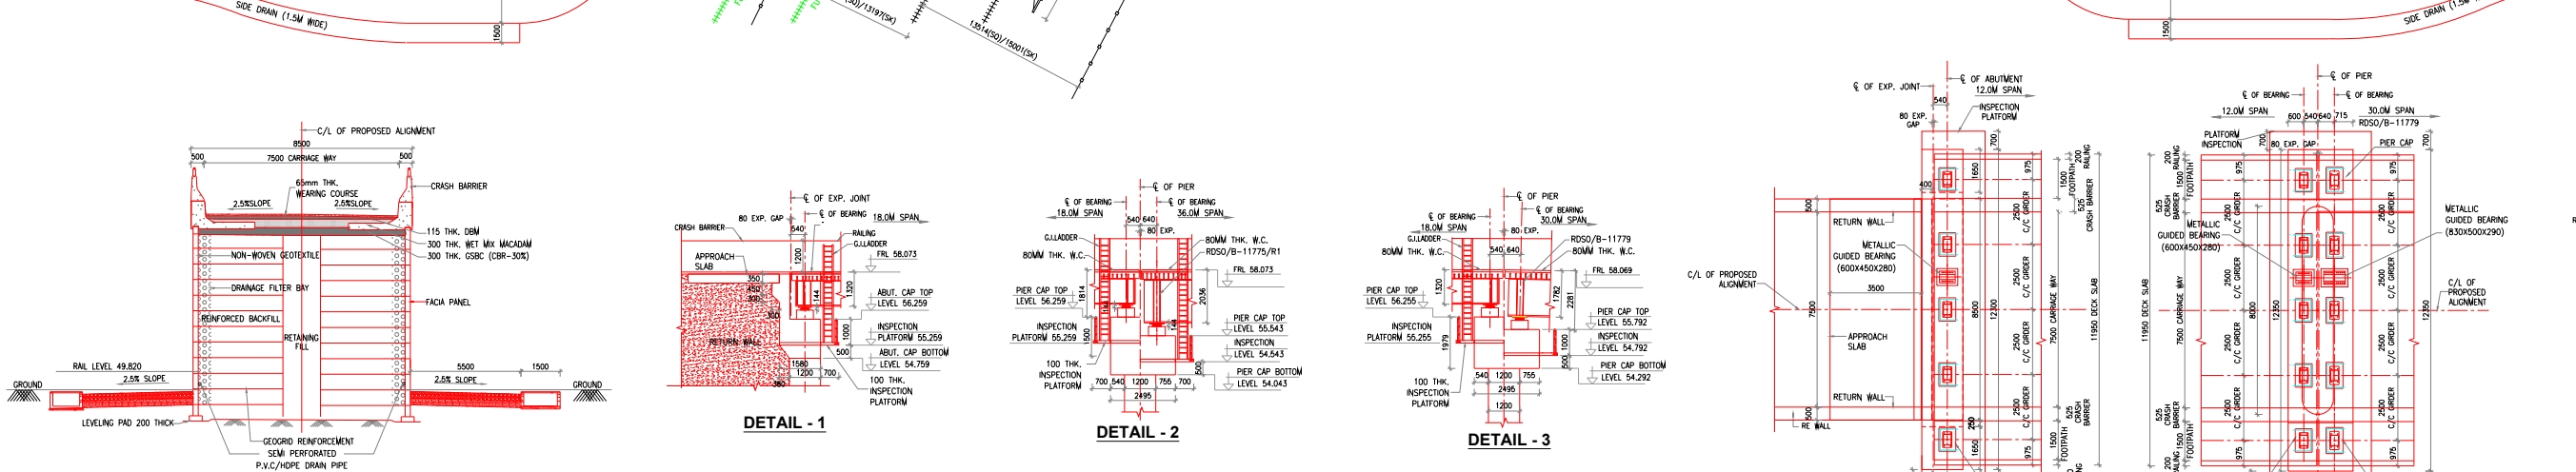
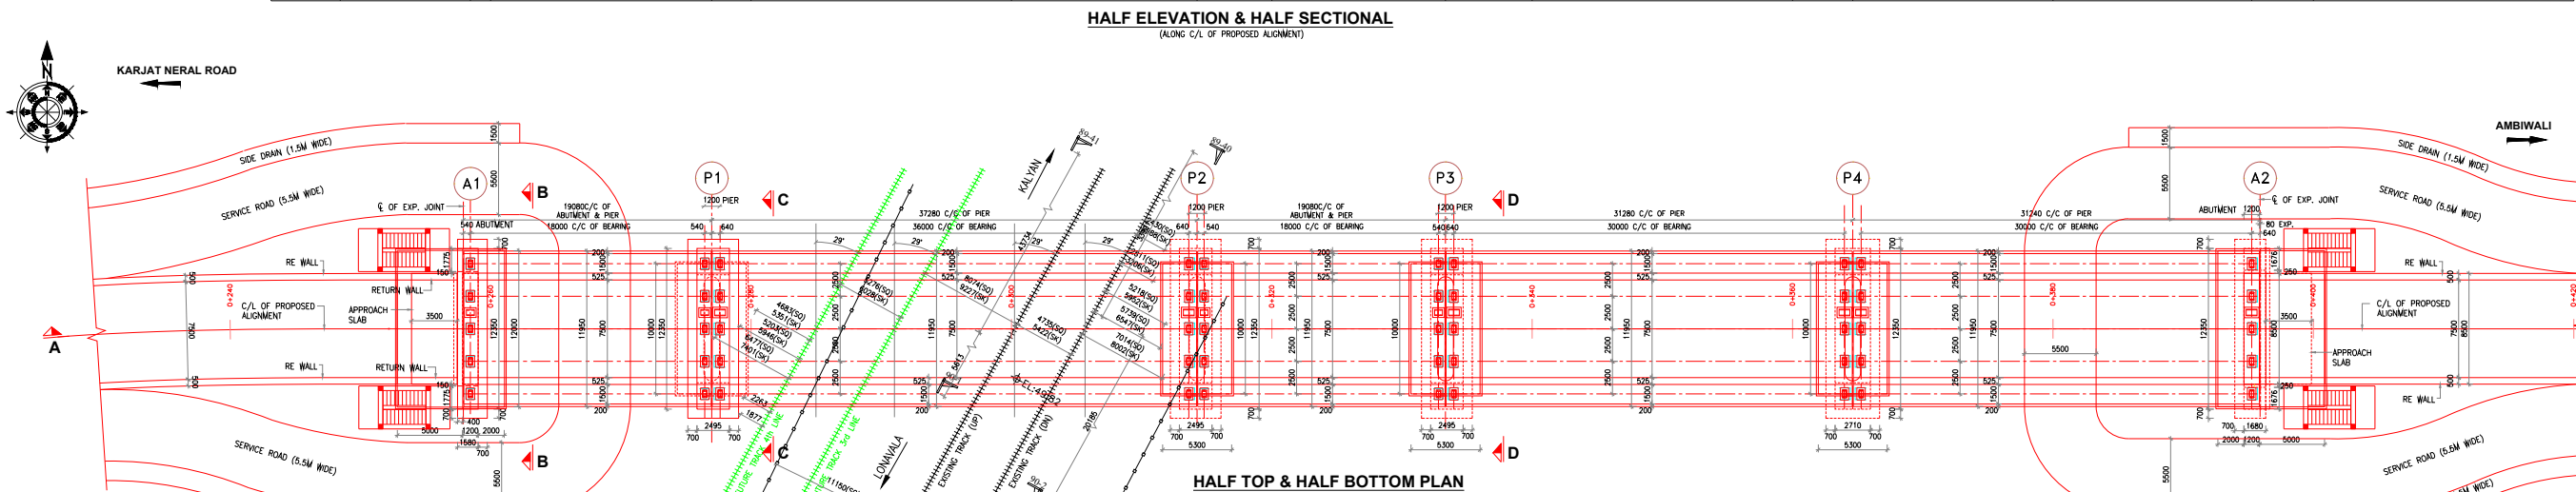


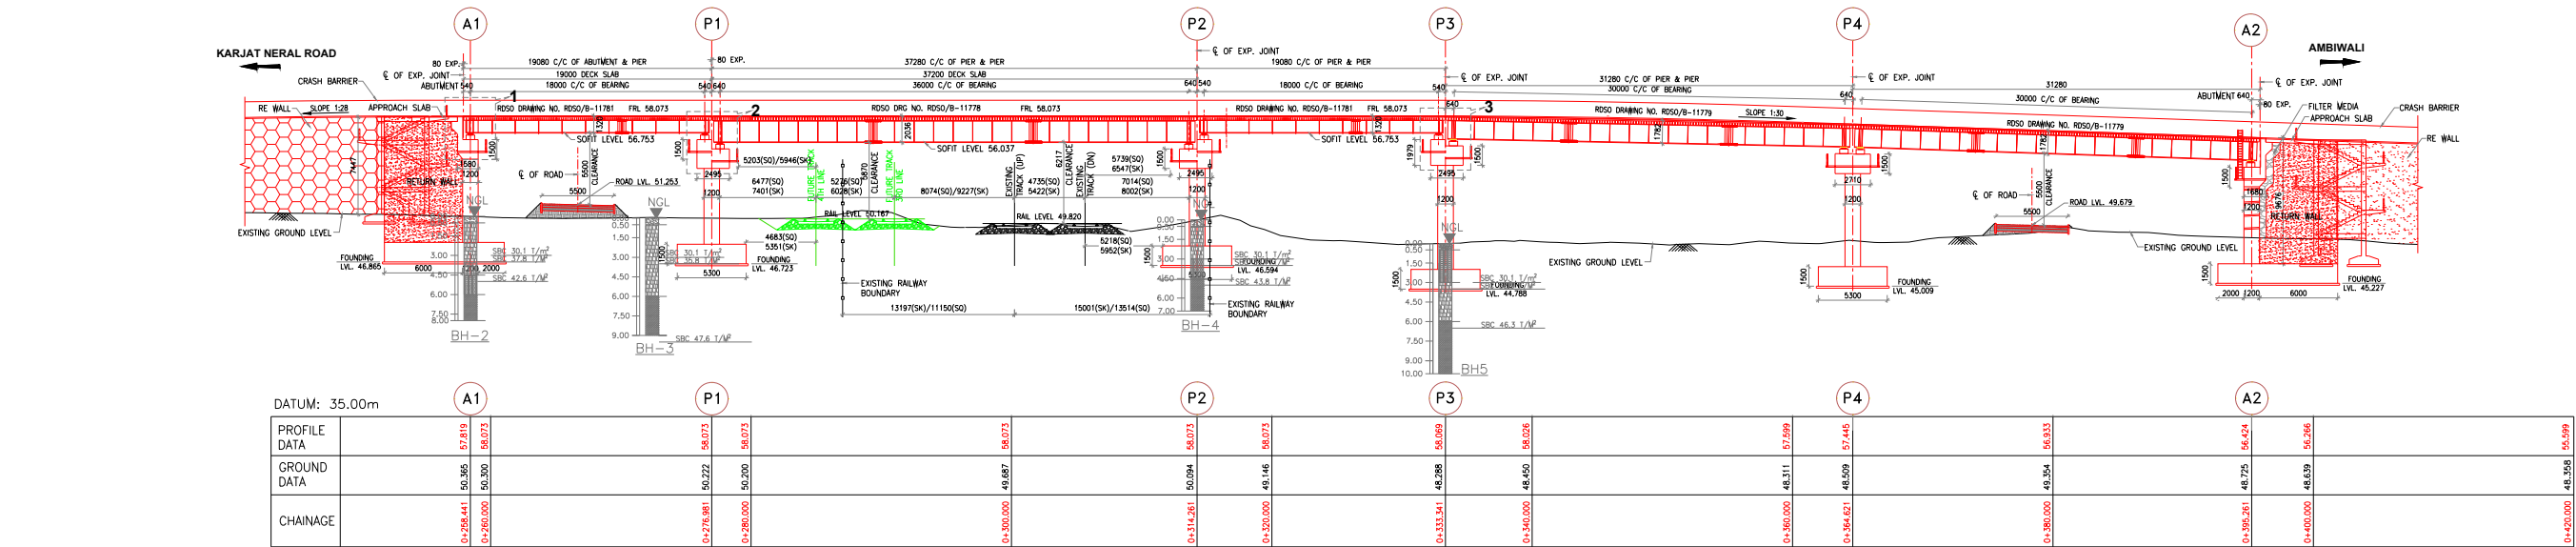

NOTES:

1. ALL DIMENSIONS ARE SHOWN IN MM. LEVELS ARE IN METER & CHAINAGE ARE IN KILOMETER UNLESS OTHERWISE MENTIONED.
2. NO DIMENSIONS SHALL BE SCALED FROM DRAWING. ONLY WRITTEN DIMENSIONS TO BE FOLLOWED.
3. ALL THE DIMENSIONS SHOWN SHOULD BE VERIFIED AT SITE BEFORE TAKING UP DESIGN WORK IN HAND. ANY DISCREPANCY NOTED SHOULD BE FORWARDED THROUGH THE APPROVAL CHAIN TO THE DESIGNER FOR RECTIFICATION.
4. SUITABLE PROTECTION RESTRICTION, IF REQUIRED, SHOULD BE IMPOSED BEFORE TAKING UP THE EXECUTION OF WORK WITH THE APPROVAL OF COMPETENT ENGINEER IN CHARGE.
5. FOUNDATION STRUCTURAL DETAILS ARE TENTATIVE AND SHALL BE PROVIDED AS REQUIRED FROM GEOTECHNICAL & STRUCTURAL DESIGN POINT OF VIEW. HOWEVER, CLEARANCES INDICATED SHALL NOT BE REDUCED.
6. REPRESENTATIVE OF SIGNALING & TELECOM DEPARTMENT SHOULD BE AVAILABLE AT SITE DURING EXECUTION WITHIN VICINITY OF SIGNALING/TELECOM CABLES.
7. ALL THE PREPARED STEEL ORDERS SHALL BE LAUNCHED USING A SUITABLE LAUNCHING SCHEME AS PER SITE REQUIREMENTS WITH THE APPROVAL OF THE RAILWAY AUTHORITY.
8. TEMPORARY DIVERSION LC SHALL BE CLOSED SIMULTANEOUSLY WITH THE COMMISSIONING OF ROB. IF PROVIDED.
9. FOR INSPECTION OF RAILWAY SPAN, PROVISION OF INSPECTION PLATFORM FOR BOTH SIDE OF PREABCAST WITH RAILING AND LADDER SHOULD BE MADE.
10. DEPTH OF FOUNDATION MAY BE ALTERED BY ENGINEER IN CHARGE TO SATISFY APPROVED QUALITY FACTOR AS PER IS 800:1983 OF PANDA 115.
11. NO PLASTERING AND CEMENT WORK PROTECTIVE COATING OVER THE CONCRETE IS PERMITTED. ANY BAD QUALITY WORK WILL BE SUMMARILY REJECTED.
12. THE VISIBILITY OF THE SIGNAL SHALL NOT BE OBSTRUCTED.
13. WEEP HOLES AT 100MM CD BOTH HORIZONTALLY AND VERTICALLY STAGGERED SHALL BE PROVIDED FOR APPROACH SECTION & RETAINING WALL.
14. CRASH BARRIER SHALL BE PROVIDED AS PER IS 1559:2015. HOWEVER, CABLE CROSSING OVER RAILWAY WILL REQUIRE SEPARATE APPROVAL.
15. TYPICAL OF C/D 300/300 (4" YEAR APRIL/2023) (ENCL. INTERLOCKED).
16. SAFETY, RELIABILITY AND LONG TERM DURABILITY OF THE OVERHEAD STRUCTURE SHALL BE ENSURED DURING THE DESIGN AND EXECUTION STAGES AS PER CENTRAL RAILWAY LETTER NO. W-418 DATED 15.10.2018.
17. WHILE SUBMITTING THE DESIGN OF ROB FOR APPROVAL TO HEADQUARTERS, MOST AT VARIOUS RELEVANT AMBIENT TEMPERATURE TO SUB CONDITIONS WITH CHECKING DATED 27.08.2018 RAILWAY CROSSING STRUCTURE SHALL BE CARRIED OUT BY THE OWNER.
18. UTILITIES IN RAILWAY PORTION AND APPROACHES ARE REQUIRED TO BE SHIFTED DURING EXECUTION.
19. A SITE OFFICE AT THE BRIDGE SITE OR AT A NEARBY LOCATION, AS DECIDED BY THE RAILWAY, SHALL BE PROVIDED AND MAINTAINED DURING THE CONSTRUCTION PERIOD OF THE ROB.
20. VERTICAL CLEARANCE FROM HIGHEST RAIL LEVEL TO BOTTOM LEVEL OF ROB SHALL NOT BE LESS THAN 5.0M.
21. IN ORDER TO WORK WITHIN RAILWAY BOUNDARY FOR CONSTRUCTION OF ROB SHALL BE DONE ONLY IN PRESENCE OF RAILWAY AUTHORITY REPRESENTATIVE TO ENSURE THE SAFETY OF RUNNING TRAINS. NO HEAVY MACHINERY WILL WORK ALONG THE TRACK WITHOUT THE PRESENCE OF RAILWAY AUTHORITY.
22. XPM PROTECTIVE FRAMES SHALL BE PROVIDED FOR ELECTRIFIED SECTION AND FIXED WITH SAFETY OF ROB ON EACH LINE ON BOTH SIDES OF ROB.
23. GALVANIZED SACRIFICIAL SHUTTERING TO BE USED FOR CASTING OF DECK SLAB. SHAPES AND SIZES OF STEEL PLATE GIRDERS, CROSS GIRDERS, BEARINGS, PEDESTALS, PERABCAST, PERABCAST CAP AND FOUNDATION SHOWN IN THIS DRAWING ARE TENTATIVE AND MAY VARY DURING THE FINAL EXECUTION AFTER APPROVAL OF DESIGN BY COMPETENT AUTHORITY.
24. AUTHORITY.
25. A SEPARATE AGREEMENT BETWEEN RLY & ROAD AUTHORITY AT OWN COST. COMPLETE RAILWAY PORTION SHALL BE MAINTAINED BY OWN COST. FROM A1 TO A2 & APPROACH PORTION WILL BE MAINTAINED BY PWD/ROAD.
26. AUTHORITY.
27. APPROXIMATE AREA OF LAND ACQUISITION REQUIRED FOR THE PROPOSED SCHEME IS 1075.50 SQM. LAND ACQUISITION WILL BE CARRIED OUT BY RAILWAY.
28. OPTIMIZED AND APPROVED BY COMPETENT AUTHORITY ON C&C/O OFFICE.
29. PCE SANCTION SHALL BE OBTAINED BEFORE COMMENCEMENT OF THE WORK.
30. PROPOSED ROB CONES UNDER EXISTING ZONE - IV A IMPROVEMENT FACTOR SHALL BE AS PER IRC - 6 & IRC - SP - 114.
31. AS PER IRC 6.3.3.1 & IRC 214, NO TENSION SHALL BE PERMITTED UNDER ANY COMBINATION OF LOADS ON SOIL.

APPROVAL OF GENERAL ARRANGEMENT DRAWING	
RQ APPROVAL	
DESIGNATION	SIGNATURE
CSE	
DR/CE	
SEC-ROB-RUB-IV	
DIVISION APPROVAL	
DRM	Digitally signed by HEMANT KUMAR SHARMA Date: 2025.02.24 10:59:49 +05'30'
ADM-INFR	Digitally signed by ANISH VERMA Date: 2025.02.23 13:30:18 +05'30'
SRJMD(CO)	Digitally signed by ADARSH KUMAR SHARMA Date: 2025.02.24 10:59:49 +05'30'
SRJMD(CO)	Digitally signed by ADARSH KUMAR SHARMA Date: 2025.02.24 10:59:49 +05'30'
SRJMD(CO)	Digitally signed by ADARSH KUMAR SHARMA Date: 2025.02.24 10:59:49 +05'30'
SRJMD(CO)	Digitally signed by ADARSH KUMAR SHARMA Date: 2025.02.24 10:59:49 +05'30'
SRJMD(CO)	Digitally signed by ADARSH KUMAR SHARMA Date: 2025.02.24 10:59:49 +05'30'
SRJMD(CO)	Digitally signed by ADARSH KUMAR SHARMA Date: 2025.02.24 10:59:49 +05'30'
SRJMD(CO)	Digitally signed by ADARSH KUMAR SHARMA Date: 2025.02.24 10:59:49 +05'30'
CONSTRUCTION APPROVAL	
CE/C/PSD	Digitally signed by HEMANT KUMAR SHARMA Date: 2025.02.24 10:59:49 +05'30'
DR/CE/C/PSD	Digitally signed by ANISH VERMA Date: 2025.02.23 13:30:18 +05'30'
DR/CE/C/PSD	Digitally signed by ADARSH KUMAR SHARMA Date: 2025.02.24 10:59:49 +05'30'
ADM/PSD	Digitally signed by ADARSH KUMAR SHARMA Date: 2025.02.24 10:59:49 +05'30'
SRJMD(CO)/PSD	Digitally signed by ADARSH KUMAR SHARMA Date: 2025.02.24 10:59:49 +05'30'
CONSULTANT - RITES Ltd.	
DESIGNATION	SIGNATURE
APPROVED BY	
CHECKED BY	
DESIGN BY	
PREPARED BY	
IRCI-6 2017	
SEISMIC ZONE - IV	
GENERAL ARRANGEMENT DRAWING	
DIVISION	MUMBAI
SECTION	KALYAN-LONAVLA (KYN-LNL)
EXECUTIVE AGENCY	RSP UNIT, CENTRAL RAILWAY
CONSULTANT	RITES Limited
PROJECT	CONSTRUCTION OF 15 ROAD OVER BRIDGES, GATI BHAKTI UNIT OF MUMBAI DIVISION OF CENTRAL RAILWAY. PB ITEM NO. 211 OF 2021-22
DRAWING TITLE	CONSTRUCTION OF ROB AT KM: 89/35-36 IN LRIU OF LC-22 AT KM: 89/51 BETWEEN NERAL-BHIVPURI ROAD RLY STATION ON KALYAN-LONAVLA SECTION (ON KALYAN NERAL ROAD-AMBWALI) SPAN: 1x18.00m+1x30m+1x18.00m+2x30.00m C.G.
DRAWING NO.	CONV/RAJ/PSD/PSD-MUMBAI/ROB-22/54
HEAD QUARTER	CONSTRUCTION: GME/PSD-1007-ROB
SCALE	1:200 & 1:100