

**GOVERNMENT OF INDIA
MINISTRY OF RAILWAYS
(RAILWAY BOARD)**

No. 2017/CE-IV/LX/Misc./244 (LCs)Pt.

New Delhi, dt. 09.05.2025

**The General Managers,
All Zonal Railways.**

Sub: Decision tree for sanctioning of ROB/RUB/LHS & Two Wheeler ROB.

- Ref:** (i) Railway Board's letter No. 2017/CE-IV/LX/Misc/244/(pt)II dated 27.12.2023.
(ii) Railway Board's letter No. 2017/CE-IV/RUB/88 dated 04.10.2017.
(iii) Railway Board's letter No. 2017/CE-IV/LX/Misc./244 (LCs) Pt. dated 19.08.2024.
(iv) Railway Board's letter No. 2017/CE-IV/LX/Misc./244 (LCs) Pt. dated 12.11.2024.

Various guidelines had been issued in past regarding construction of ROB/RUB/LHS & FOB(Two Wheeler ROB). These works are taken up as per the feasibility at site, cost estimate and availability of funds. Several representations are being received for the construction of ROB/FOB at the site of newly constructed subways due to problem of water logging. Representations are also being received for the construction of LHS at the site of newly constructed/ under construction ROB's due to inconvenience of pedestrians/ cyclists who have to travel a longer path in order to climb the ROB.

2.0 Railway Board has considered the issue and it is felt necessary to issue instructions so that the works are sanctioned considering the genuine difficulties of the public at large. The guidelines for planning and sanctioning the works of ROB/RUB/LHS/Two Wheeler ROB are given as under:

- A. Construction of ROB/Subway/Two Wheeler ROB at LC location:** During Technical Feasibility Report/Detailed Project (TFR/DPR) stage, the Level Crossing (LC) and the surrounding area should be surveyed with respect to the height of the railway embankment and availability of natural drain nearby. The planning for ROB/RUB/LHS/Two Wheeler ROB should be carried out in accordance with the following:
- (i) **In case of High Embankment:** RUB/Subway of maximum possible size as per the type/classification of road (NH/SH/MDR/DDR/VR) may be planned as per the feasibility at site.
 - (ii) **In case of Low Embankment:**
 - a) Normally, construction of ROB (at non-habitated area) / ROB cum LHS (at habitated area) should be preferred.
 - b) In the case of Level Crossings (LCs) with very low TVU or where the construction of a ROB is not feasible, a RUB/LHS may be planned, ensuring adequate drainage arrangements. Preference should be given to solutions based on natural drainage, else the provision of recharge pits with adequate percolation should be made.

[Handwritten signature]
9/5/25

- (iii) If the provision of natural drainage or recharge pits is not feasible, and pump and sump system of drainage is the only option, a Two-Wheeler ROB or smaller size additional box may also be provided alongwith RUB/LHS as per site feasibility.

B. Construction of LHS/Subway/FOB (Two Wheeler ROB) at non LC location: In exceptional circumstances as defined in Para 2.1.2 & 2.1.3 after due examination of proposal in accordance with Para 2.2 of Railway Board letter dated 19.08.2024 {Ref. (iii)}, LHS/Subway/FOB (Two Wheeler ROB) at non LC location may be provided. During TFR / DPR stage, the location of non-LC and the surrounding area should be thoroughly surveyed with respect to the type of trespass, feasibility of natural drainage, etc. The planning of Subway/FOB (Two Wheeler ROB) should be carried out in accordance with following guidelines:

- (i) **Non LC locations having low trespass:** Preferably FOB (Two Wheeler ROB) may be planned at such location.
- (ii) **Non LC locations having heavy trespass:**
- a) LHS with natural drainage/ recharge pit arrangement along with cover shed should be given preference.
 - b) If the provision of natural drainage or recharge pits in LHS/RUB is not feasible and pump and sump system of drainage is the only option for the LHS /RUB, then FOB (Two-Wheeler ROB) may also be provided alongwith the RUB/LHS with personal approval of PCE.


3.0 Planning of ROB/RUB/LHS for the whole block section should be done holistically, keeping in view the requirement of the overall transport system of the region. Road crossing works (ROB/RUB) of full height should be given at reasonable interval to facilitate the movement of heavy machinery such as harvester and other equipments of farmers.

4.0 The proposals should be accordingly submitted to Railway Board for shortlisting as per letter referred (iv) above.

5.0 The schematic diagram of '**Decision Tree**' is enclosed as **Annexure- 1**.

This is issued with the approval of Board (M.I.).


D.A: As above.


(Hemant Kumar)
Director/CE(B&S)-II
Railway Board

Copy to: 1. All PCEs, CAO/C & CAO/C/RSPs for necessary action.
2. DG/IRICEN, Pune for information.

Decision Tree for Sanction of RUB (Subway)/LHS/Light ROB

[Ref: Letter No. 2017/CE-IV/LX/Misc./244 (LCs)Pt. dated 09.05.2025]

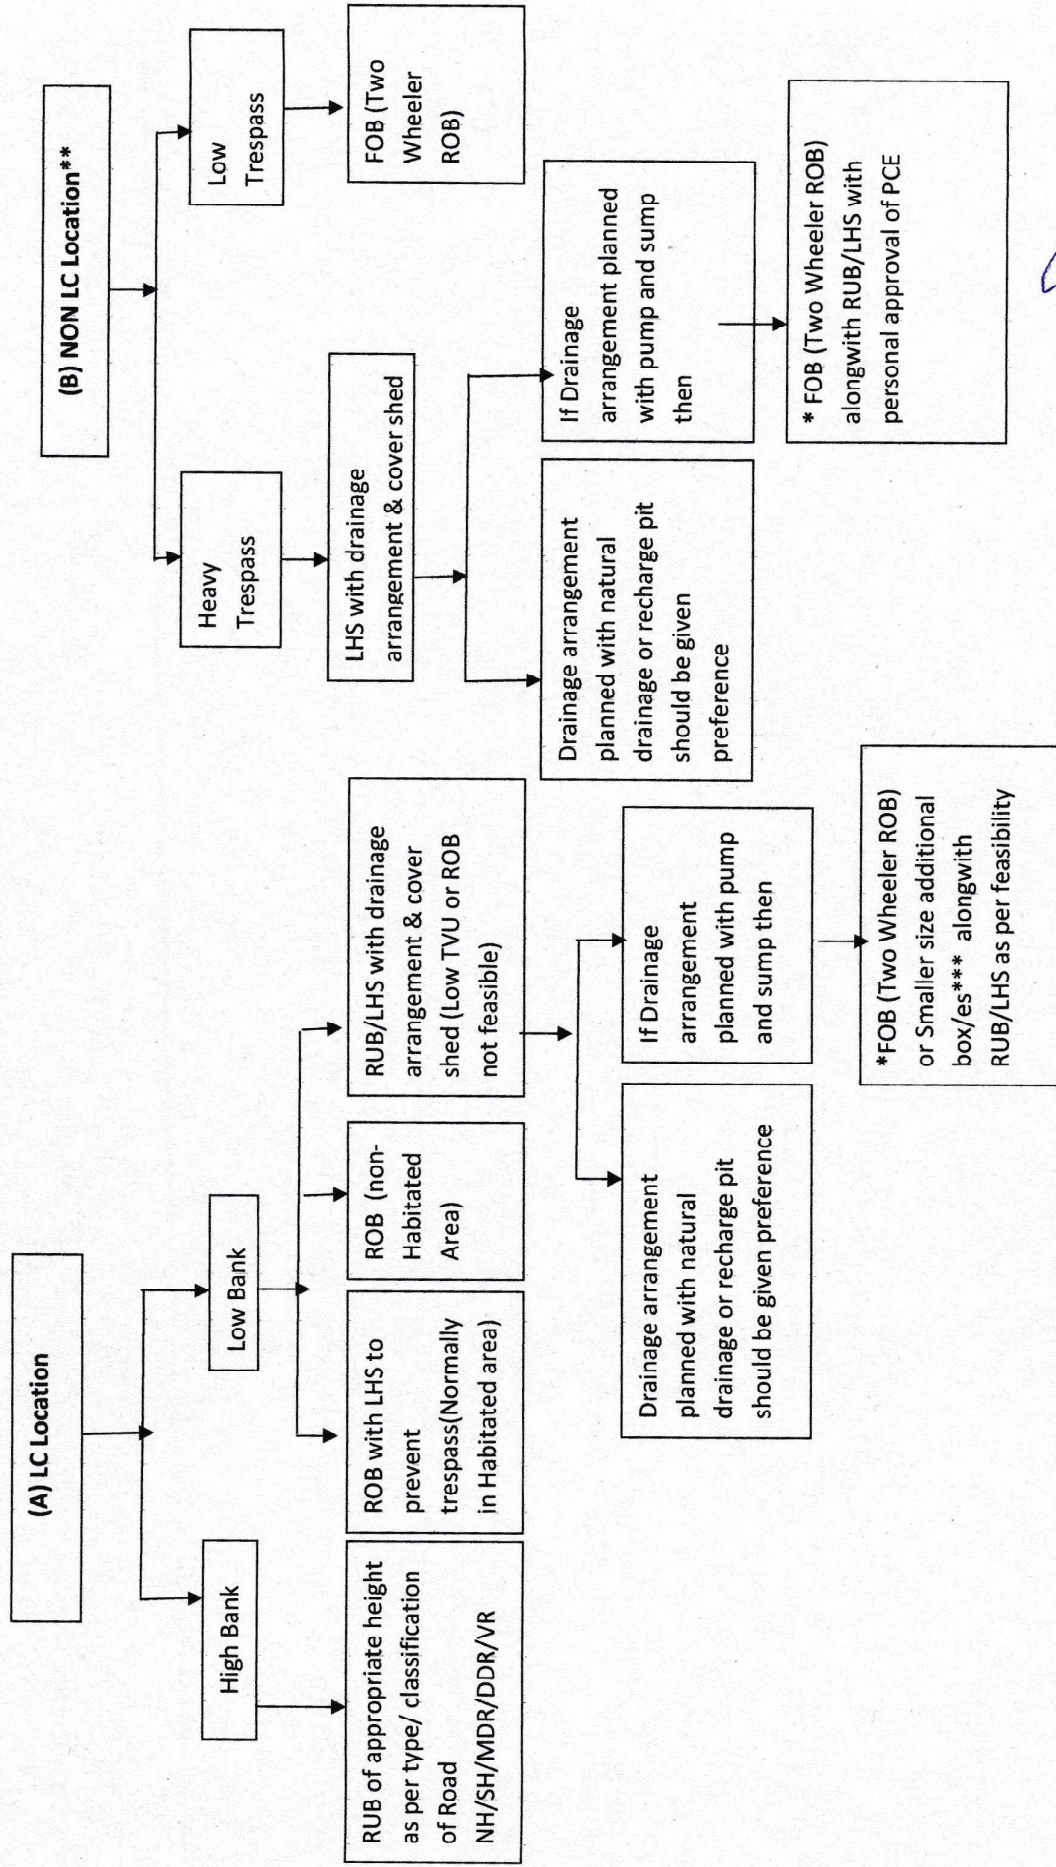

Notes: *Two Wheeler ROB may also be planned with LHS

** Exceptional cases only as per Para 2.1.2 & 2.1.3 of Policy Letter No. 2017/CE-IV/LX/Misc./244 (LCs) Pt. dated 19.08.2024.

*** As per Policy letter No. 2017/CE-IV/88 dated 23.02.2023.

Handwritten signature and date:
DCE/RS-II
9/5/25